



# ALPHA 3

REINFORCE OPERATIONS.



OPEN OR CLOSED  
3-MAN CAB




ONBOARD & REMOTE  
DIAGNOSTICS



PARTS  
COMMONALITY



GROUND LEVEL  
SERVICE POINTS

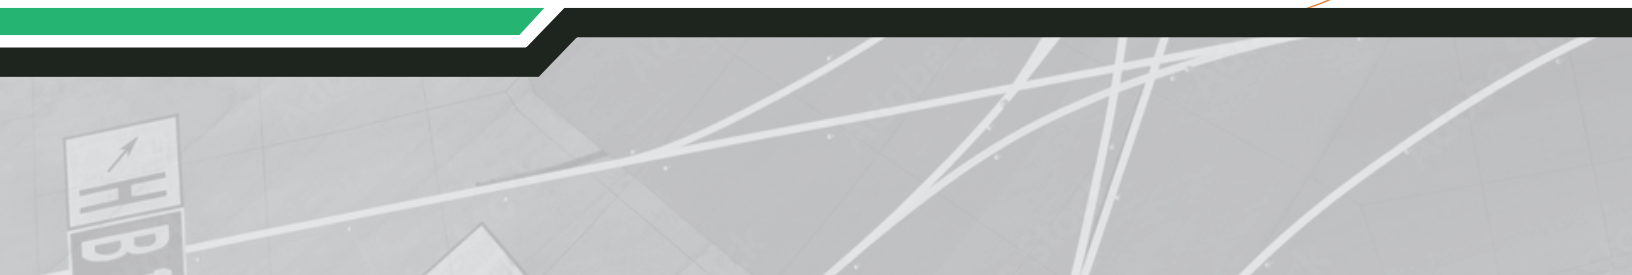

# TUG - ALPHA 3

Reinforce your ground support operations with the reliable, versatile, and user-friendly TUG™ ALPHA 3. Featuring a cabin equipped with enhanced visibility, ergonomic controls and ample storage, the TUG ALPHA 3 is a preferred choice among operators. Incorporating a multitude of safety features, this pushback helps prioritize the well-being of your team and your assets. Engineered with common parts allowing for easier serviceability, the TUG ALPHA 3 exemplifies performance while maintaining cost-effectiveness.



## CHASSIS POWER

### Cummins QSB 4.5 L

Type	Water-Cooled, Direct Injected, Turbocharged 4 Cylinder
Fuel & Compatible Fuel (Type & Quantity)	65 US gal [246 L] - ULSD only
Displacement (Size of Engine)	275 CID [4.5 L]
Governed RPM w/ Full Load	2,500
Net Brake HP at Governed RPM	163 [122 kW]
Transmission	ZF 4WG190 [4F/2R]
Torque	466 lb ft [632 Nm]

## DIMENSIONS

Width	107.5" [2731.6 mm]
Wheel Base	94" [2,387.6 mm]
Height (Less Cab)	79.6" [2021.7 mm]
Height (With Cab)	91" [2313.7 mm]
Maximum Weight	60,000 lbs [27,215.5 kg]
Length (Without Hitches)	237.3" [6027.6 mm]
Ground Clearance	10" [250 mm]

## PERFORMANCE

Top Speed	15 mph [24.1 km/h]
EPA Tier / Certification Level	EPA Tier 4F / EU Stage IV
CE Certified	Yes
Max Drawbar	44,000 lbs [19,958 kg]



Specifications are subject to change without notice. Models shown may include optional features.  
© 2023 Textron Ground Support Equipment Inc. All rights reserved. 82716-G1 [Rev. 0923]

**TEXTRON** 

TEXTRONGSE.COM